
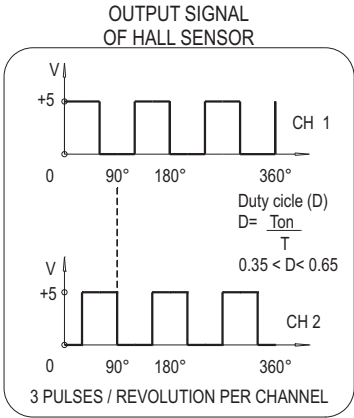
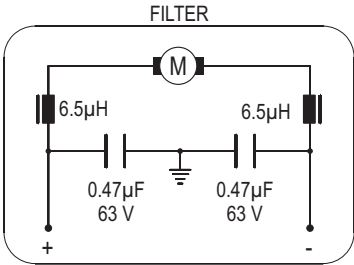




Connector 6P  
MOLEX type MINI FIT 5557

ALIMENTATION CABLES  
PVC section 0,75mm<sup>2</sup>  
with terminal MOLEX 5556T  
(RED+ / BLUE-)


CONNECTION CABLES



COUNTER CLOCKWISE  
with positive voltage on red cable

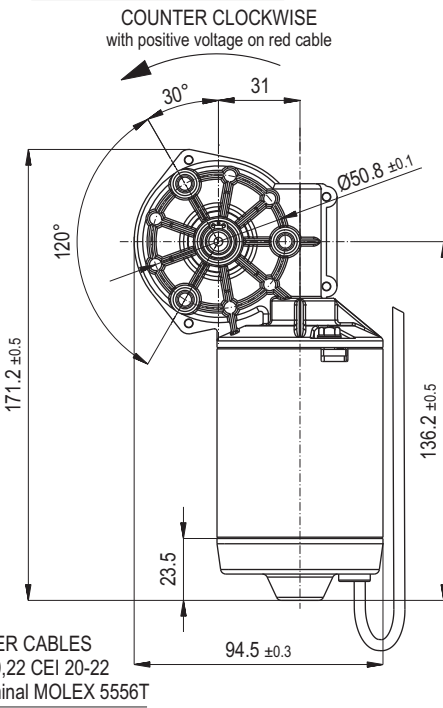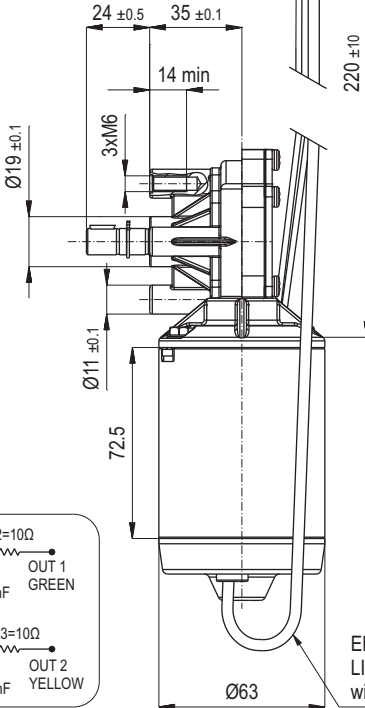


ENCODER CABLES  
LIYY 4x0,22 CEI 20-22  
with terminal MOLEX 5556T

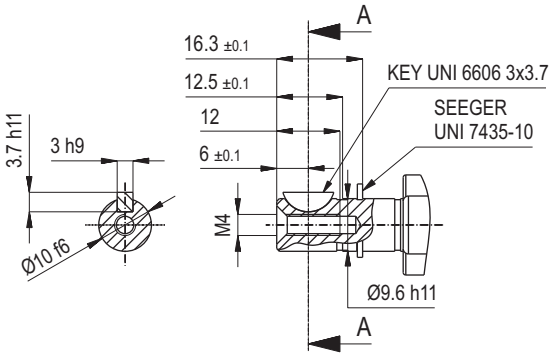

HINWEIS / Remark

Lieferung inkl. Scheibenfeder. Supply incl. halfmoon-key.

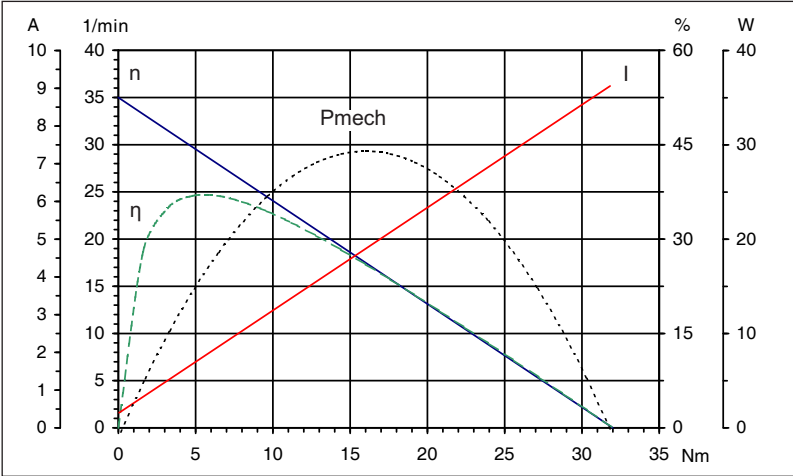

| Technische Daten / Technical data |                      |                   |
|-----------------------------------|----------------------|-------------------|
| Nennspannung / Nominal voltage    | 24                   | V/DC              |
| Leerlaufdrehzahl / No-load speed  | 35                   | min <sup>-1</sup> |
| Neundrehmoment / Nom. torque      | 6                    | Nm                |
| Anlaufmoment / Starting torque    | 32                   | Nm                |
| Zahnradwerkstoff / Gear material  | Kunststoff / Plastic |                   |
| Übersetzung / Gear ratio          | 69:1                 |                   |
| Schutzart / Protection class      | IP 20                |                   |
| Gewicht / Weight                  | 1,1                  | kg                |

Diese Angaben sind Mittelwerte gemessen im kalten Zustand des Motors. Abweichungen von ±10% sind möglich. Technische Änderungen vorbehalten.  
These data are measured average values at cold engine. Deviations from ±10% are possible. Subject to change without notice.