





DCPM 42 T39


3




42 mm




12 / 24 Volt



39 mm



3 - 900 min⁻¹

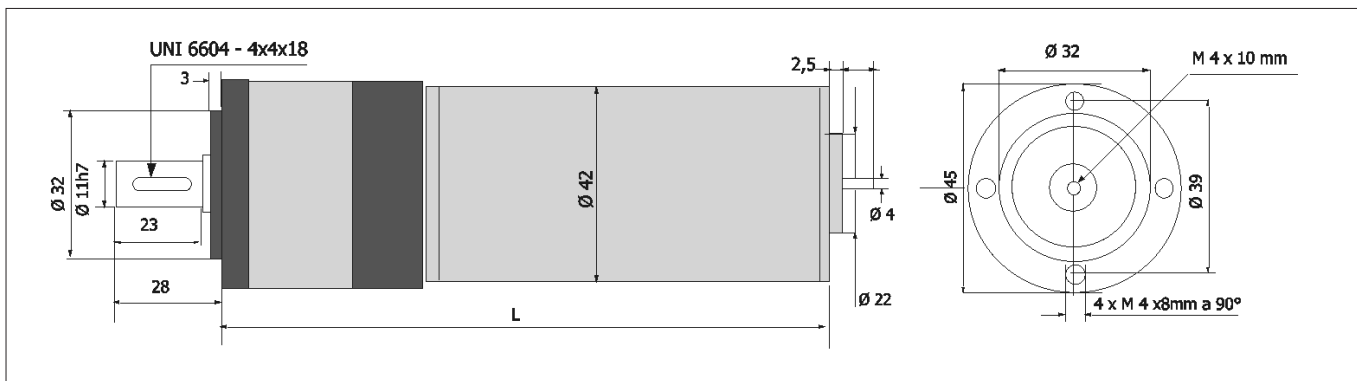

Bestell-Nr. Order-No.	Nennspannung Nominal voltage	Leerlaufdrehzahl No-load speed	Anlaufmoment Starting torque	Anlaufstrom Starting current	Nennmoment Nominal torque	i Gear ratio	Mass L Dimension L
724.281	12 V/DC	3 U/min.	32,0 Nm	~1,4 A	18,00 Nm	1296:1	176 mm
724.280	12 V/DC	7 U/min.	32,0 Nm	~3,2 A	18,00 Nm	576:1	176 mm
724.279	12 V/DC	17 U/min.	32,0 Nm	~6,0 A	13,50 Nm	216:1	162 mm
724.278	12 V/DC	26 U/min.	32,0 Nm	~11,0 A	9,50 Nm	144:1	162 mm
724.277	12 V/DC	38 U/min.	22,0 Nm	~11,0 A	6,20 Nm	96:1	162 mm
724.276	12 V/DC	55 U/min.	14,0 Nm	~11,0 A	3,30 Nm	64:1	162 mm
724.275	12 V/DC	98 U/min.	8,8 Nm	~11,0 A	2,25 Nm	36:1	146 mm
724.274	12 V/DC	150 U/min.	6,3 Nm	~11,0 A	1,65 Nm	24:1	146 mm
724.273	12 V/DC	230 U/min.	4,2 Nm	~11,0 A	1,12 Nm	16:1	146 mm
724.272	12 V/DC	600 U/min.	1,9 Nm	~11,0 A	0,41 Nm	6:1	130 mm
724.271	12 V/DC	900 U/min.	1,4 Nm	~11,0 A	0,29 Nm	4:1	130 mm

Bestell-Nr. Order-No.	Nennspannung Nominal voltage	Leerlaufdrehzahl No-load speed	Anlaufmoment Starting torque	Anlaufstrom Starting current	Nennmoment Nominal torque	i Gear ratio	Mass L Dimension L
724.296	24 V/DC	3 U/min.	32,0 Nm	~0,7 A	18,00 Nm	1296:1	176 mm
724.295	24 V/DC	7 U/min.	32,0 Nm	~1,6 A	18,00 Nm	576:1	176 mm
724.294	24 V/DC	17 U/min.	32,0 Nm	~3,0 A	13,50 Nm	216:1	162 mm
724.293	24 V/DC	26 U/min.	32,0 Nm	~5,5 A	9,50 Nm	144:1	162 mm
724.292	24 V/DC	38 U/min.	22,0 Nm	~5,5 A	6,20 Nm	96:1	162 mm
724.291	24 V/DC	55 U/min.	14,0 Nm	~5,5 A	3,30 Nm	64:1	162 mm
724.290	24 V/DC	98 U/min.	8,8 Nm	~5,5 A	2,25 Nm	36:1	146 mm
724.289	24 V/DC	150 U/min.	6,3 Nm	~5,5 A	1,65 Nm	24:1	146 mm
724.288	24 V/DC	230 U/min.	4,2 Nm	~5,5 A	1,12 Nm	16:1	146 mm
724.287	24 V/DC	600 U/min.	1,9 Nm	~5,5 A	0,41 Nm	6:1	130 mm
724.286	24 V/DC	900 U/min.	1,4 Nm	~5,5 A	0,29 Nm	4:1	130 mm