





DCPM 77 T65


3




77 mm




12 / 24 Volt



65 mm



14 - 725 min⁻¹

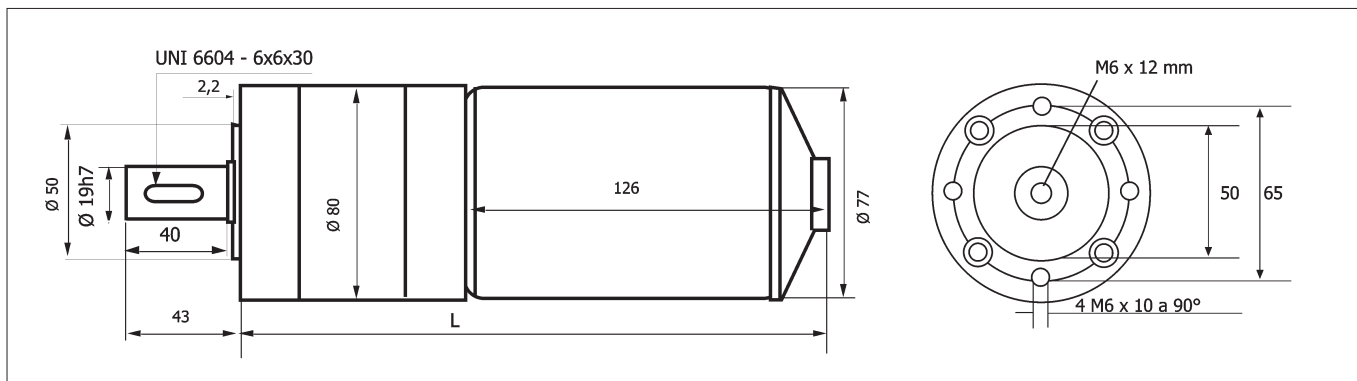

Bestell-Nr. Order-No.	Nennspannung Nominal voltage	Leerlaufdrehzahl No-load speed	Anlaufmoment Starting torque	Anlaufstrom Starting current	Nennmoment Nominal torque	i Gear ratio	Mass L Dimension L
727.709	12 V/DC	14 U/min.	85 Nm	~18 A	30,0 Nm	216:1	260 mm
727.708	12 V/DC	20 U/min.	85 Nm	~24 A	23,0 Nm	144:1	260 mm
727.707	12 V/DC	30 U/min.	85 Nm	~36 A	17,0 Nm	96:1	260 mm
727.706	12 V/DC	47 U/min.	85 Nm	~50 A	14,0 Nm	64:1	260 mm
727.705	12 V/DC	80 U/min.	51 Nm	~50 A	7,3 Nm	36:1	239 mm
727.704	12 V/DC	120 U/min.	31 Nm	~50 A	4,4 Nm	24:1	239 mm
727.703	12 V/DC	180 U/min.	23 Nm	~50 A	3,4 Nm	16:1	239 mm
727.702	12 V/DC	480 U/min.	9 Nm	~50 A	1,3 Nm	6:1	219 mm
727.701	12 V/DC	725 U/min.	6 Nm	~50 A	0,9 Nm	4:1	219 mm

Bestell-Nr. Order-No.	Nennspannung Nominal voltage	Leerlaufdrehzahl No-load speed	Anlaufmoment Starting torque	Anlaufstrom Starting current	Nennmoment Nominal torque	i Gear ratio	Mass L Dimension L
727.729	24 V/DC	14 U/min.	85 Nm	~9 A	30,0 Nm	216:1	260 mm
727.728	24 V/DC	20 U/min.	85 Nm	~12 A	23,0 Nm	144:1	260 mm
727.727	24 V/DC	30 U/min.	85 Nm	~18 A	17,0 Nm	96:1	260 mm
727.726	24 V/DC	47 U/min.	85 Nm	~25 A	14,0 Nm	64:1	260 mm
727.725	24 V/DC	80 U/min.	51 Nm	~25 A	7,3 Nm	36:1	239 mm
727.724	24 V/DC	120 U/min.	31 Nm	~25 A	4,4 Nm	24:1	239 mm
727.723	24 V/DC	180 U/min.	23 Nm	~25 A	3,4 Nm	16:1	239 mm
727.722	24 V/DC	480 U/min.	9 Nm	~25 A	1,3 Nm	6:1	219 mm
727.721	24 V/DC	725 U/min.	6 Nm	~25 A	0,9 Nm	4:1	219 mm