

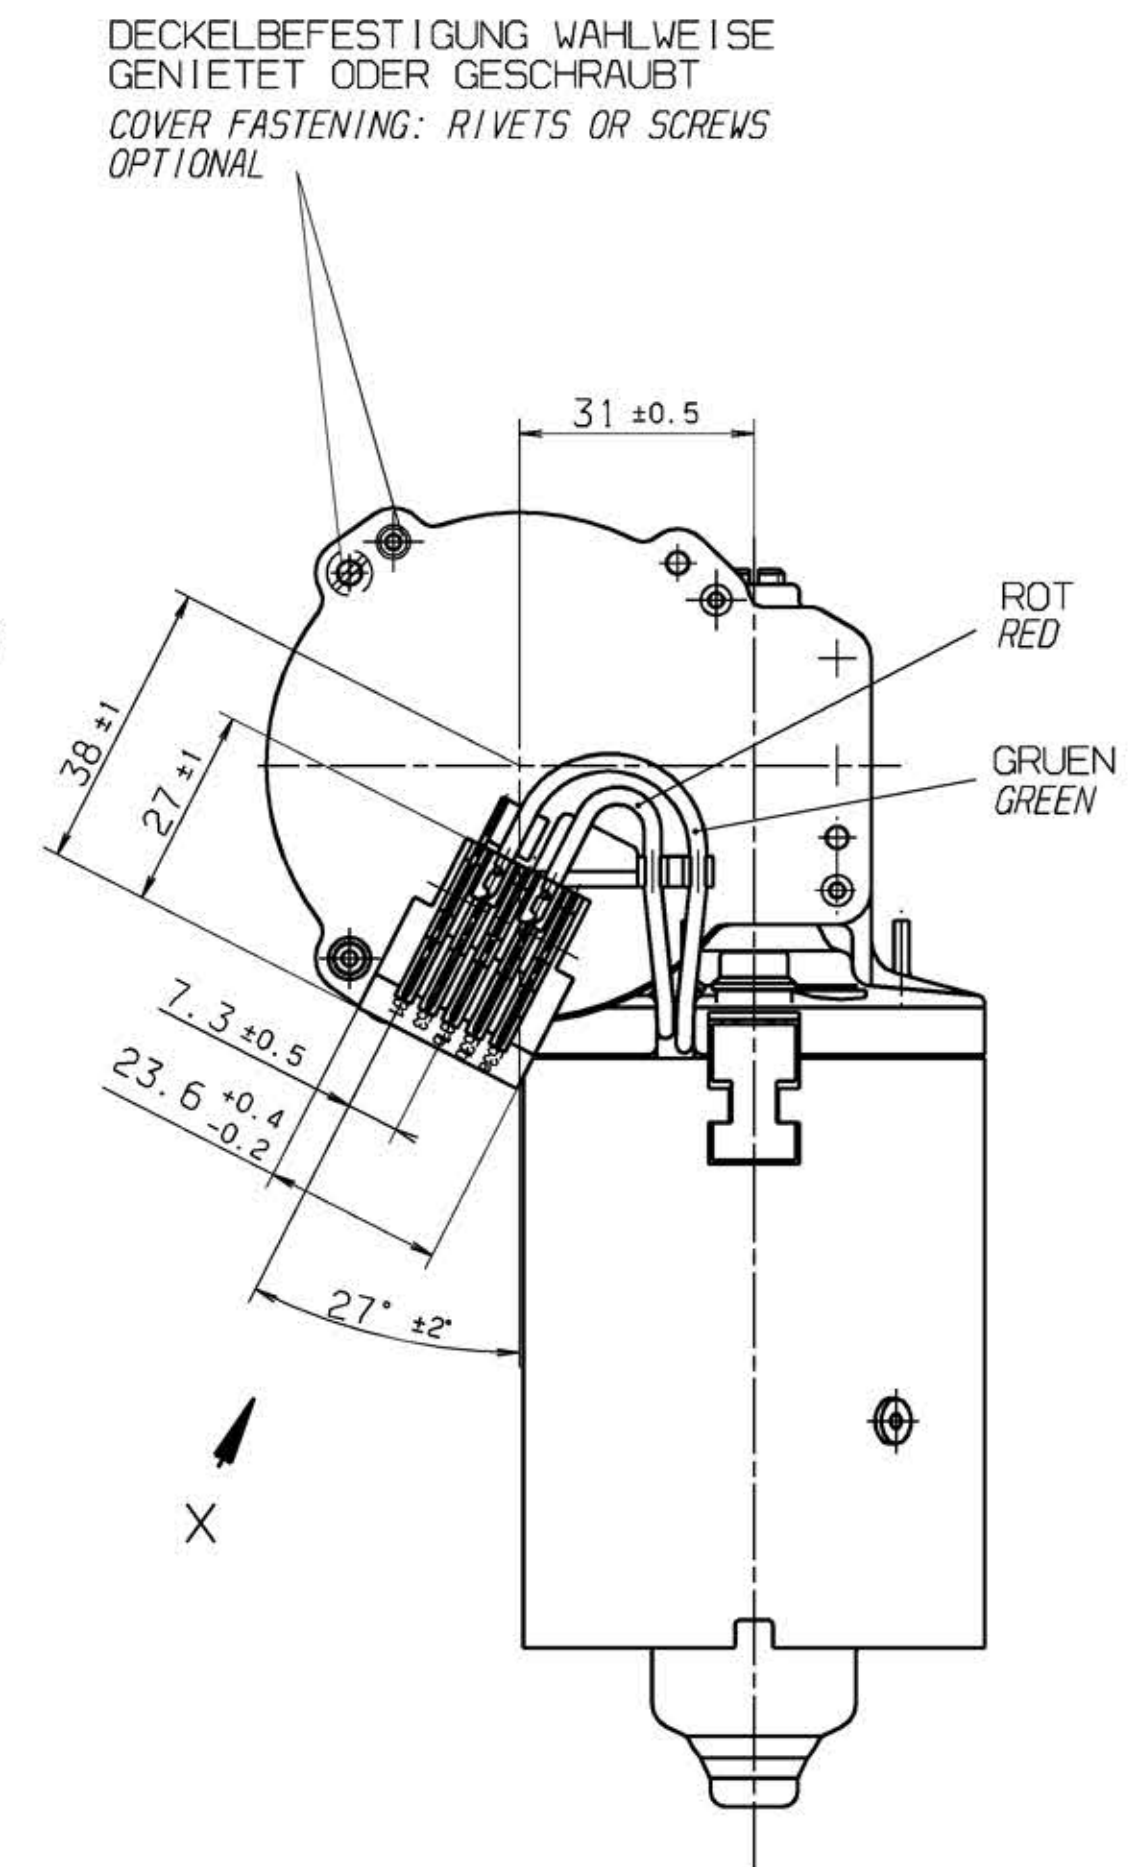
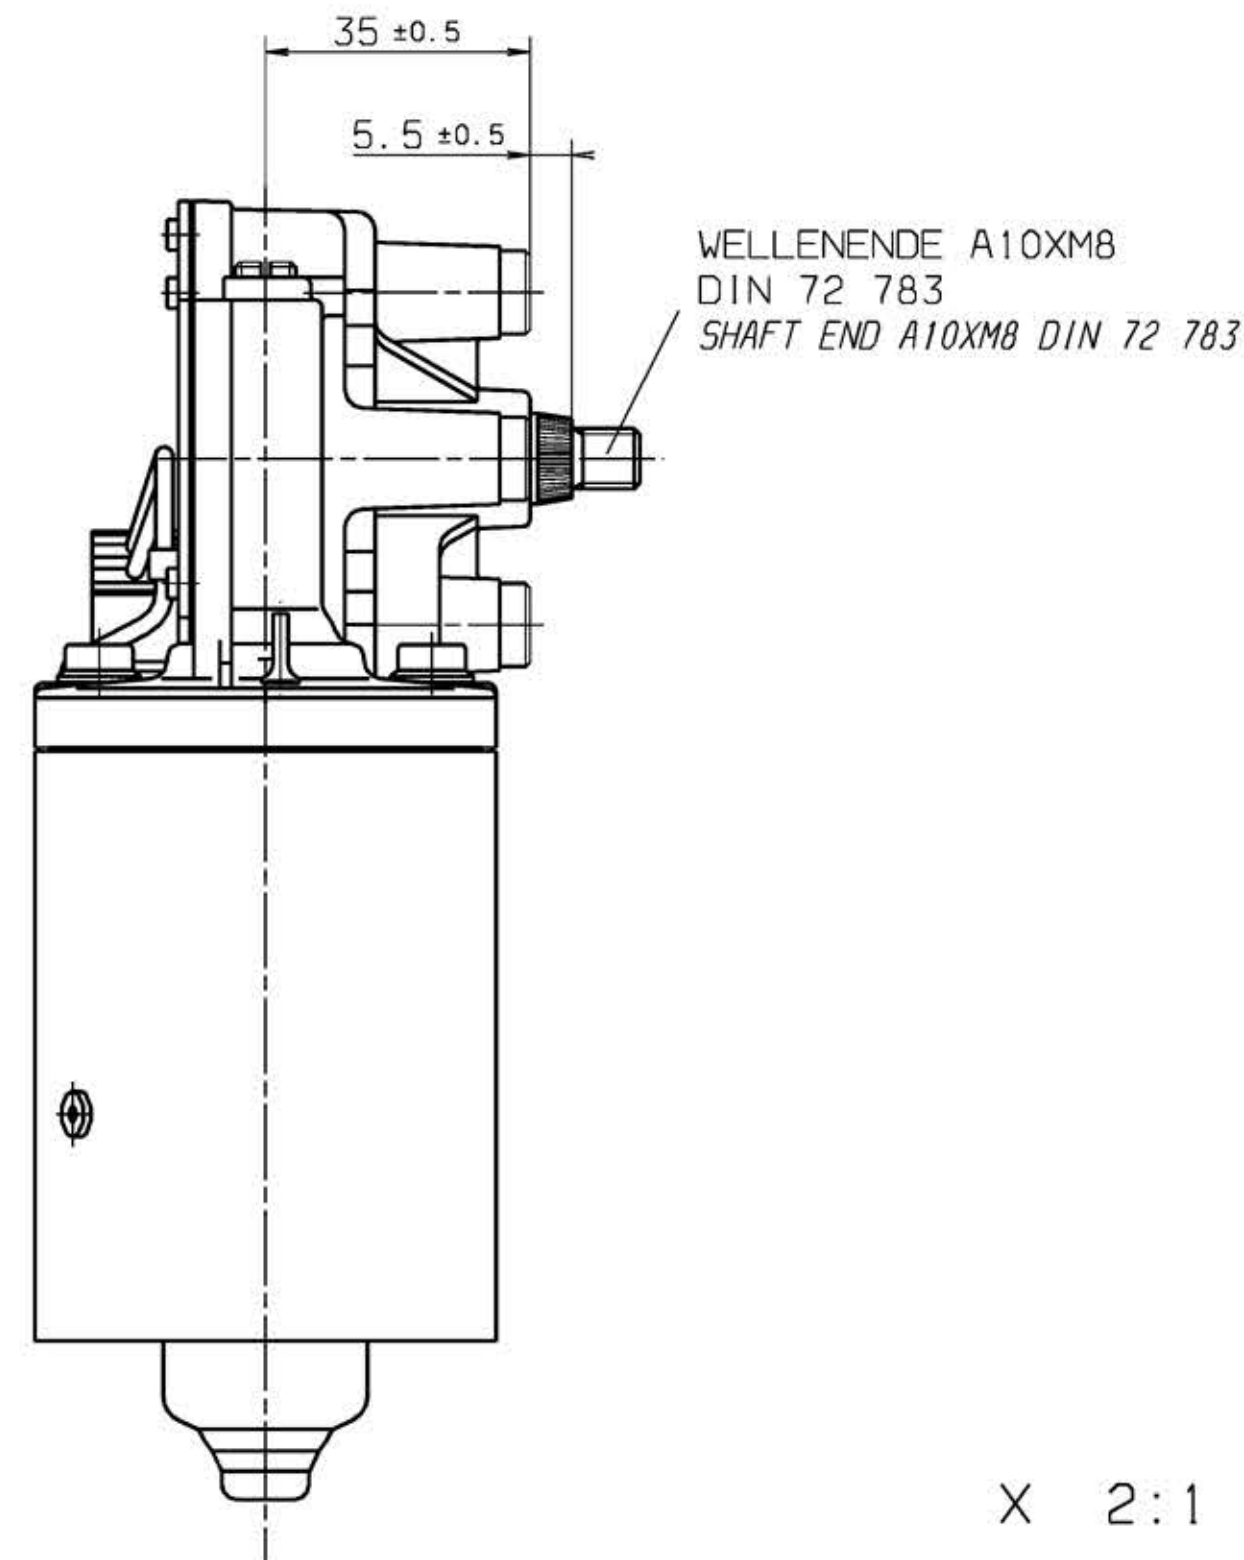


* SUMMENTEILUNGSFEHLER ±20'
* CUMULATIVE PITCH ERROR

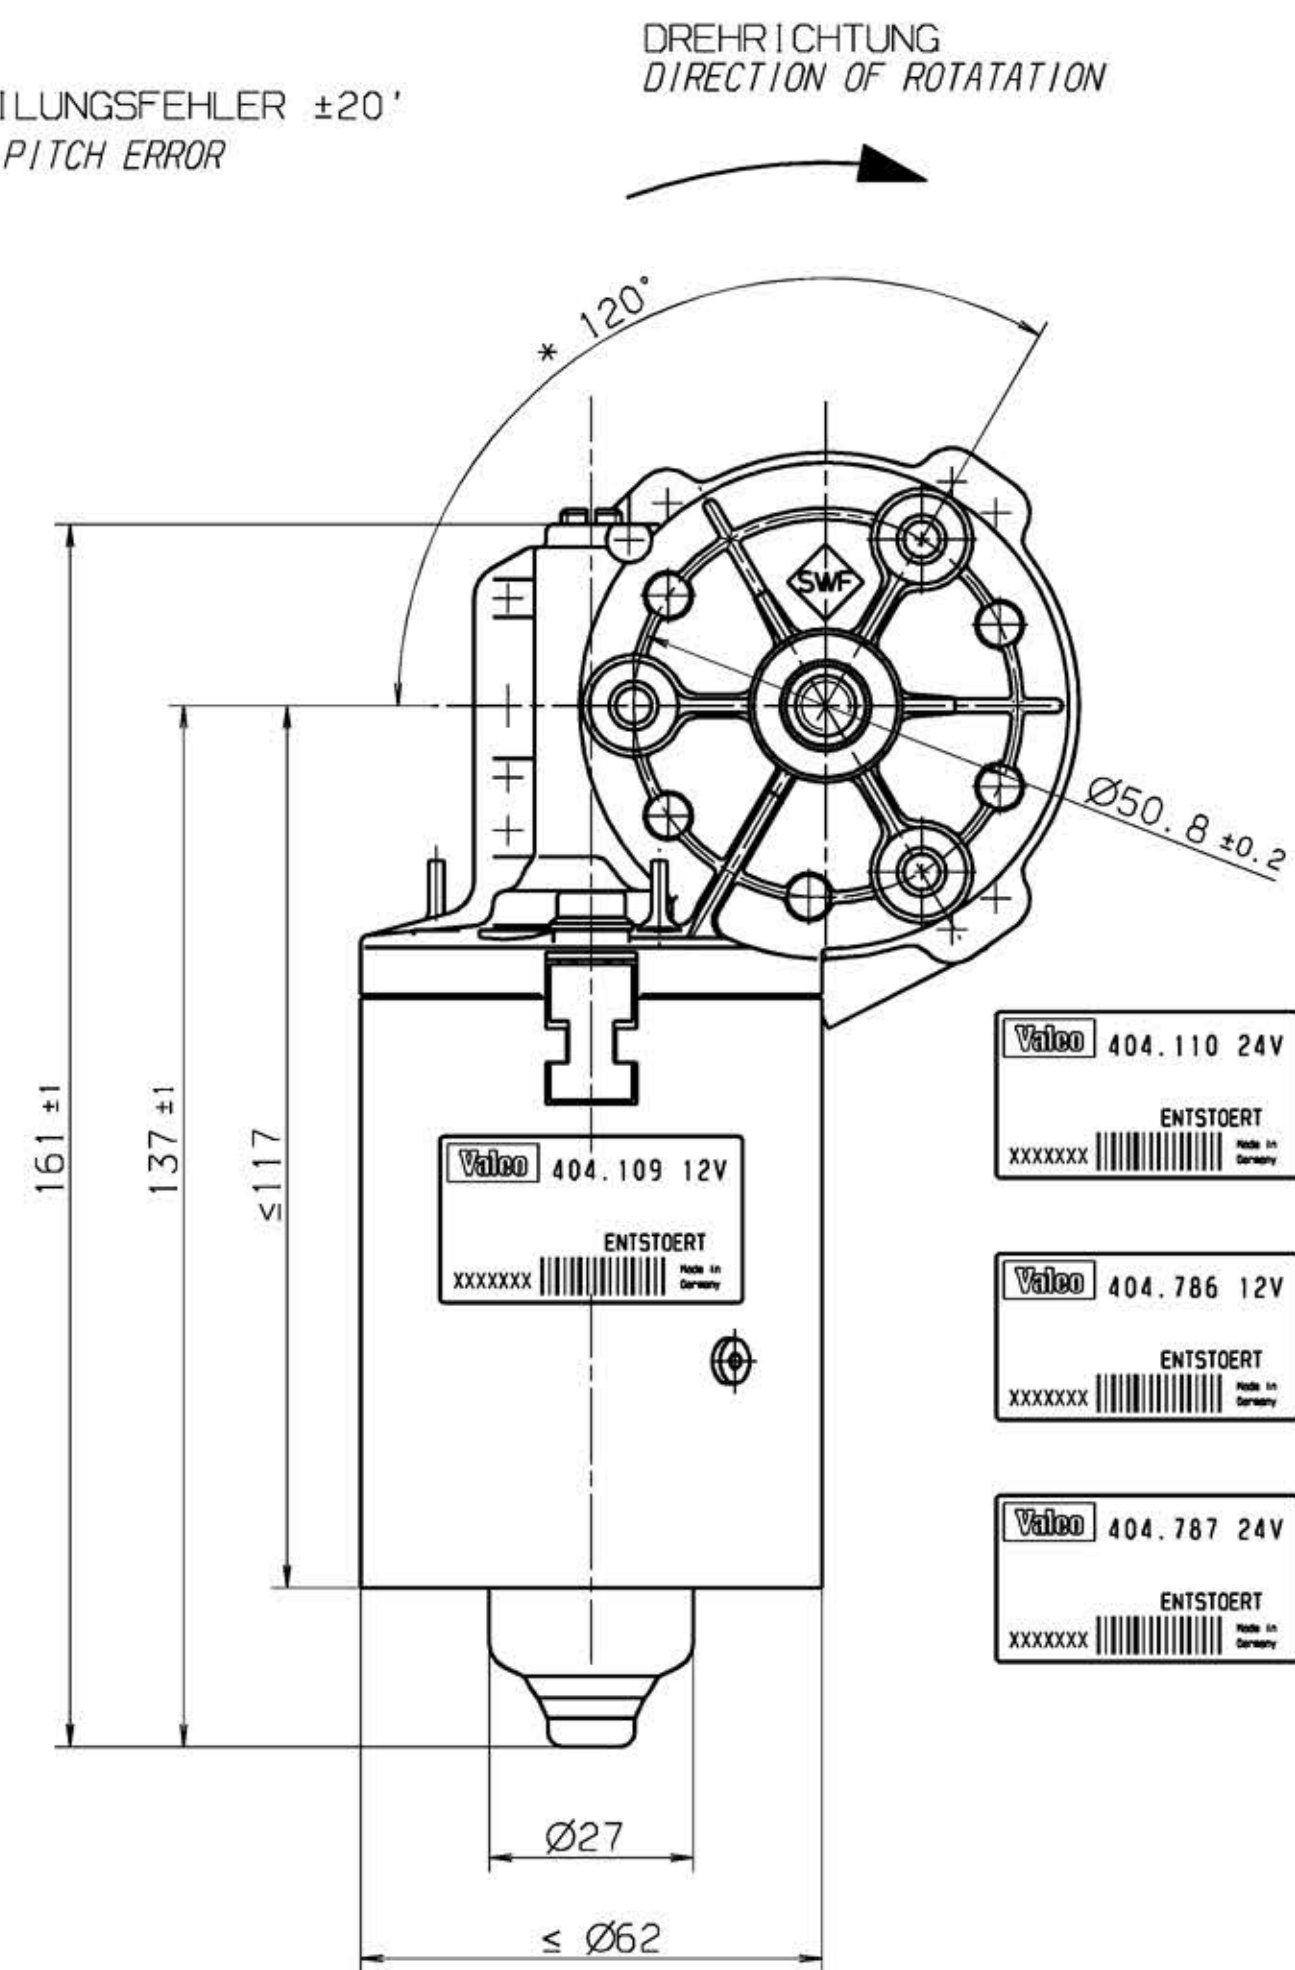



SCHALTPLAN
CIRCUIT DIAGRAM

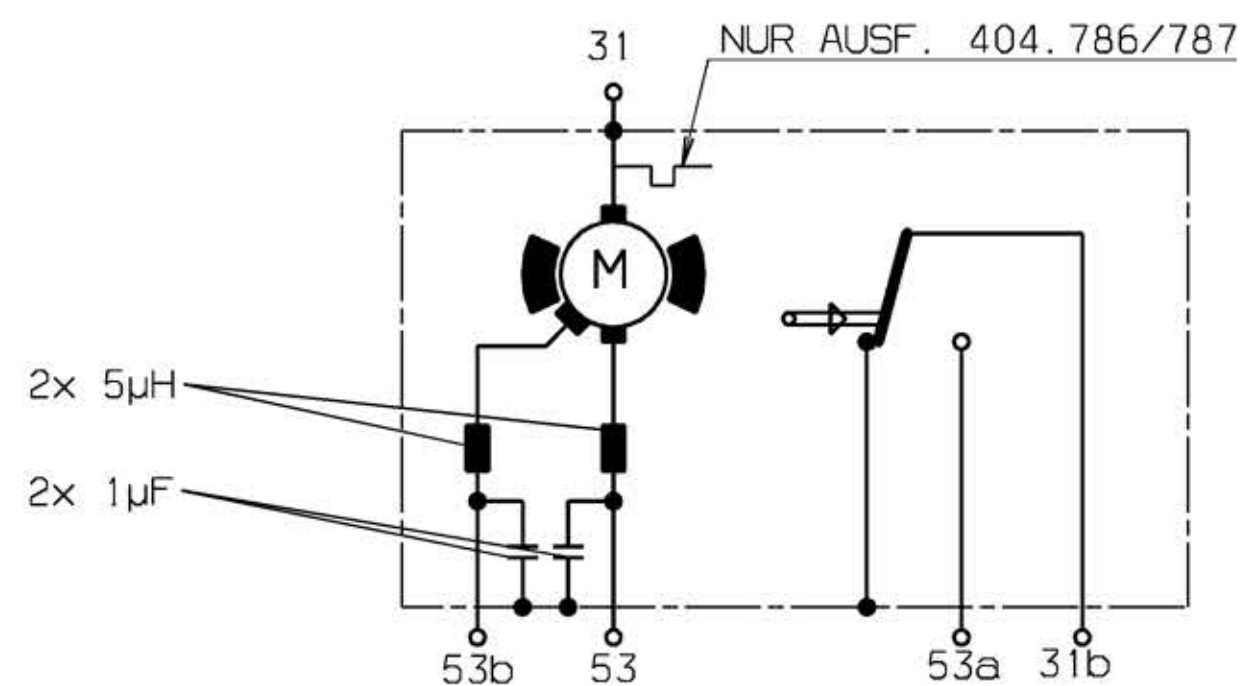

LEISTUNGSWERTE
CHARACTERISTICS

DREHZAHL n_{B1} = 35 ±4 min⁻¹
SPEED
DREHZAHL n_{B2} = 55 ±5 min⁻¹
SPEED
ANZUGSMOMENT M_A = 24 Nm
STARTING TORQUE
BETR. MOMENT M_B = 1 Nm
OPERATING TORQUE

PASSEND ZU 5-POLIGEM FLACHSTECK-
HUELSENGEHAEUSE AK-NR. 2334
FA. REINSHAGEN
TO SUIT TO 5-WAY FEMALE SPADE TERMINAL HSG
AK-NO. 2334 FIRM REINSHAGEN

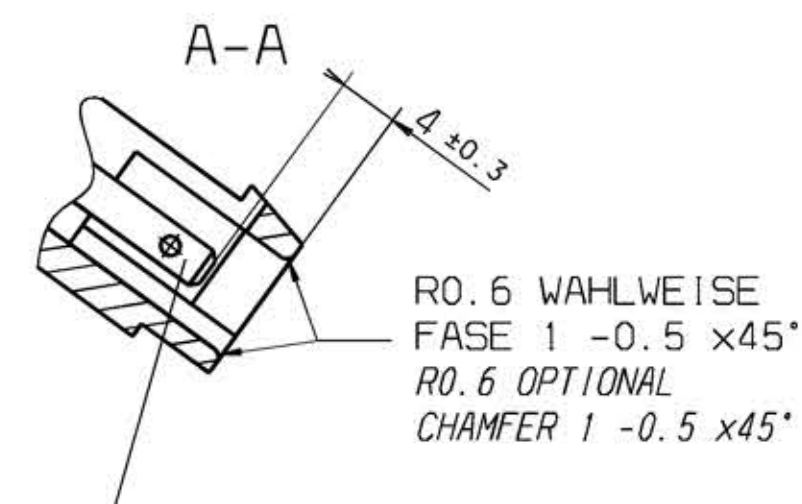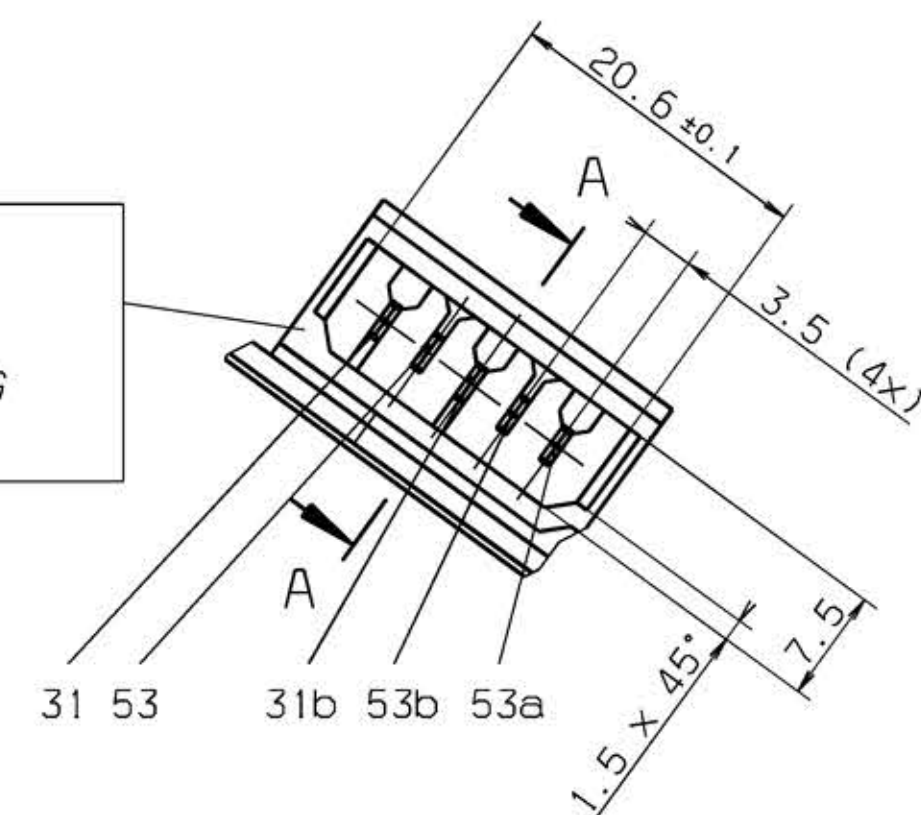

FLACHSTECKERENDE 2.8x0.8 DIN 46244
MALE SPADE TERMINAL 2.8x0.8 DIN 46244

