


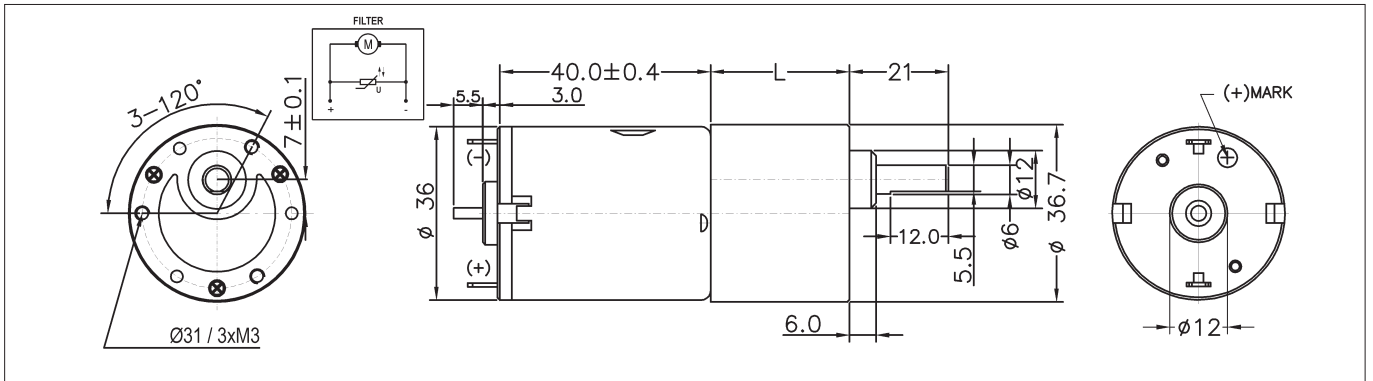

Bestell-Nr. Order-No.	Nennspannung Nominal voltage	Leerlaufdrehzahl No-load speed	Anlaufmoment Starting torque	Nennmoment Nominal torque	Nennstrom Nominal current	i Gear ratio	Mass L Dimension L
614.043	12 V/DC	1,5 U/min.	2,10 Nm	2,00 Nm	~0,7 A	3000:1	32,0 mm
614.042	12 V/DC	4 U/min.	1,90 Nm	1,80 Nm	~0,7 A	1000:1	29,5 mm
614.041	12 V/DC	8 U/min.	1,80 Nm	1,70 Nm	~0,7 A	500:1	29,5 mm
614.017	12 V/DC	17 U/min.	1,80 Nm	1,60 Nm	~0,8 A	250:1	27,0 mm
614.015	12 V/DC	22 U/min.	1,80 Nm	1,50 Nm	~0,8 A	200:1	27,0 mm
614.013	12 V/DC	29 U/min.	1,50 Nm	1,15 Nm	~0,8 A	150:1	27,0 mm
614.011	12 V/DC	36 U/min.	1,50 Nm	0,90 Nm	~0,8 A	120:1	27,0 mm
614.010	12 V/DC	44 U/min.	1,50 Nm	0,85 Nm	~0,8 A	100:1	24,5 mm
614.007	12 V/DC	58 U/min.	1,00 Nm	0,65 Nm	~0,8 A	75:1	24,5 mm
614.005	12 V/DC	88 U/min.	0,70 Nm	0,40 Nm	~0,8 A	50:1	24,5 mm
614.003	12 V/DC	146 U/min.	0,50 Nm	0,28 Nm	~0,8 A	30:1	22,0 mm
614.001	12 V/DC	440 U/min.	0,30 Nm	0,10 Nm	~0,8 A	10:1	19,5 mm

Bestell-Nr. Order-No.	Nennspannung Nominal voltage	Leerlaufdrehzahl No-load speed	Anlaufmoment Starting torque	Nennmoment Nominal torque	Nennstrom Nominal current	i Gear ratio	Mass L Dimension L
614.063	24 V/DC	1,5 U/min.	2,10 Nm	2,00 Nm	~0,4 A	3000:1	32,0 mm
614.062	24 V/DC	4 U/min.	1,90 Nm	1,80 Nm	~0,4 A	1000:1	29,5 mm
614.061	24 V/DC	8 U/min.	1,80 Nm	1,70 Nm	~0,4 A	500:1	29,5 mm
614.037	24 V/DC	17 U/min.	1,80 Nm	1,60 Nm	~0,5 A	250:1	27,0 mm
614.035	24 V/DC	22 U/min.	1,80 Nm	1,50 Nm	~0,5 A	200:1	27,0 mm
614.033	24 V/DC	29 U/min.	1,50 Nm	1,15 Nm	~0,5 A	150:1	27,0 mm
614.031	24 V/DC	36 U/min.	1,50 Nm	0,90 Nm	~0,5 A	120:1	27,0 mm
614.030	24 V/DC	44 U/min.	1,50 Nm	0,85 Nm	~0,5 A	100:1	24,5 mm
614.027	24 V/DC	58 U/min.	1,00 Nm	0,65 Nm	~0,5 A	75:1	24,5 mm
614.025	24 V/DC	88 U/min.	0,70 Nm	0,40 Nm	~0,5 A	50:1	24,5 mm
614.023	24 V/DC	146 U/min.	0,50 Nm	0,28 Nm	~0,5 A	30:1	22,0 mm
614.021	24 V/DC	440 U/min.	0,30 Nm	0,10 Nm	~0,5 A	10:1	19,5 mm